NOVA LUCE

Linear Lights
2026


LINEAR

With production now based in Greece, our linear lighting collection becomes more flexible, more responsive, and more closely aligned with the needs of each project.

Designed for architectural, commercial, and residential applications, the range offers a clean and consistent design language across different dimensions, lengths, finishes, and color temperature options. From standard solutions to made-to-measure configurations, each luminaire can be adapted to the space, the lighting concept, and the technical requirements of the installation.


This new approach allows us to provide linear lighting with greater freedom in specification, while maintaining the quality, precision, and reliability required for modern lighting projects.

A complete Range of Linear Dimensions

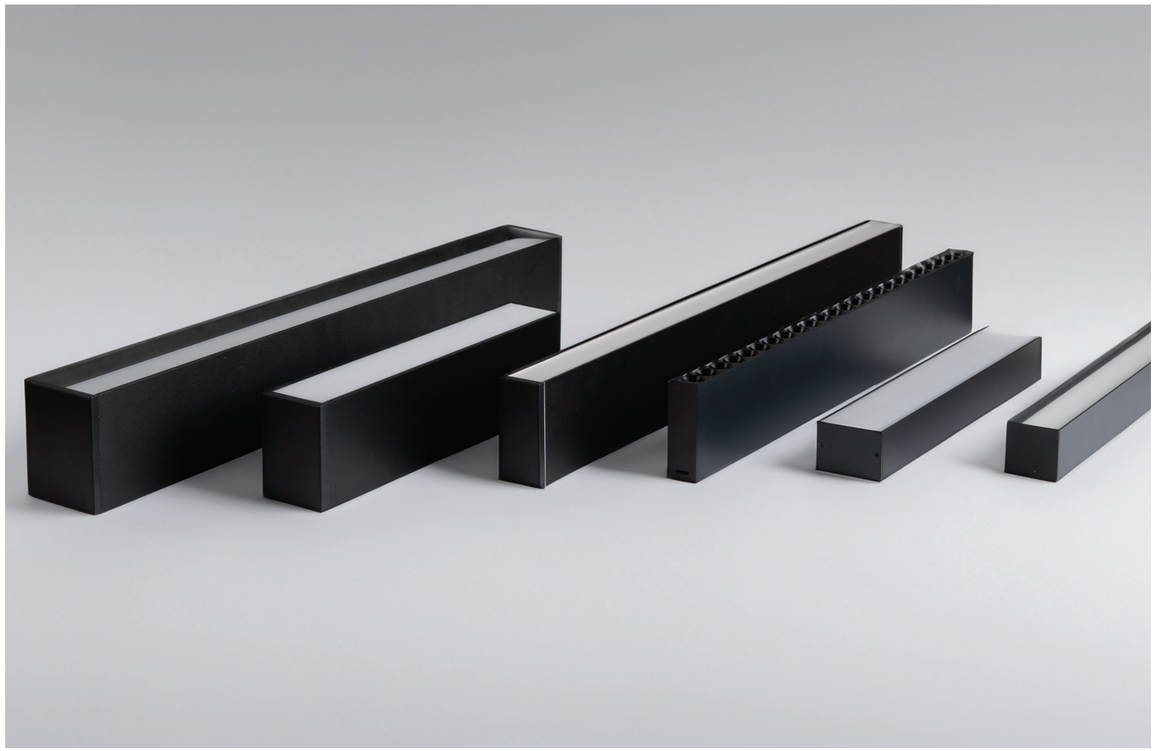

Different sizes Same design Language

The collection has been developed to cover a wide range of applications through different linear profiles, sizes, and proportions. From slim and discreet versions to wider, more decorative solutions, as well as deeper profiles for architectural and technical lighting needs, each option is designed to respond to a specific type of project. This variety allows us to offer a complete linear lighting solution, combining design flexibility, functional performance, and a consistent visual identity across every application.

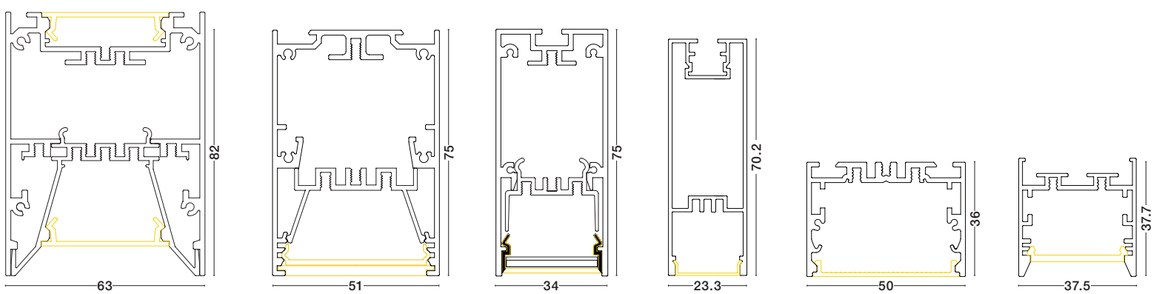

Flexible Mounting Solutions

The range is available in multiple mounting options to suit different architectural and technical requirements. Ceiling-mounted, recessed, trimless, and suspended versions allow each luminaire to be integrated naturally into the space, while different canopy options provide additional flexibility for suspended installations.












Extended Lenglets, Clean Results

The linear range can be produced in custom lengths of up to 5 metres in one continuous piece, allowing longer installations with fewer joints and a cleaner final result. This gives each project greater freedom in design, while maintaining a uniform appearance and continuous light output across the full length of the luminaire.

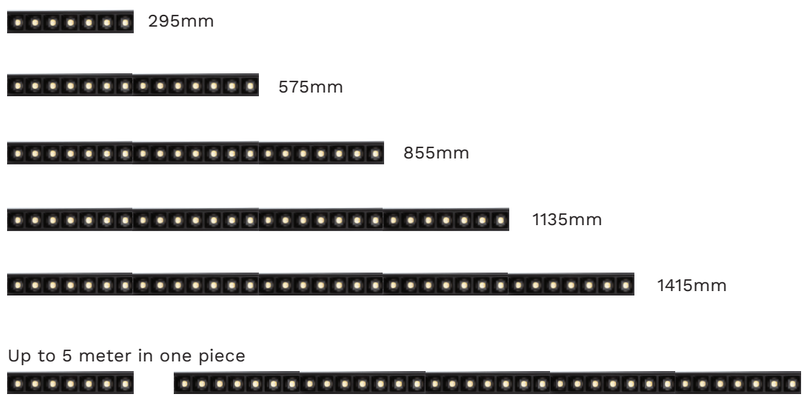

Custom Colors and Finishes

Beyond the classic black and white options, the range can be customised in any RAL color and a variety of finishes to match the design identity of each project. This flexibility allows the luminaires to blend discreetly into the architecture or become a distinctive design element, depending on the required aesthetic.




Color Options for inner trims and Reflectors

The range also offers a variety of color options for inner trims and reflectors, allowing each luminaire to be adapted not only to the exterior finish, but also to the desired lighting effect and visual detail. This added level of customisation helps create either a discreet, uniform appearance or a more distinctive contrast within the fixture.



Advanced Optical Solutions

The range is available with different optical solutions to support a wide variety of applications and lighting requirements. Opal diffusers with different transmittance levels and Dark Frosted versions provide soft, homogeneous illumination, while Micro Prismatic optics combine high efficiency with improved visual comfort. For projects requiring enhanced glare control, Dark Performance UGR<16 and Dark Grid UGR<14 options help reduce glare and create a more comfortable lighting environment. High-performance PMMA extruded lenses in 48° and 11° are also available for general or grazing lighting applications.

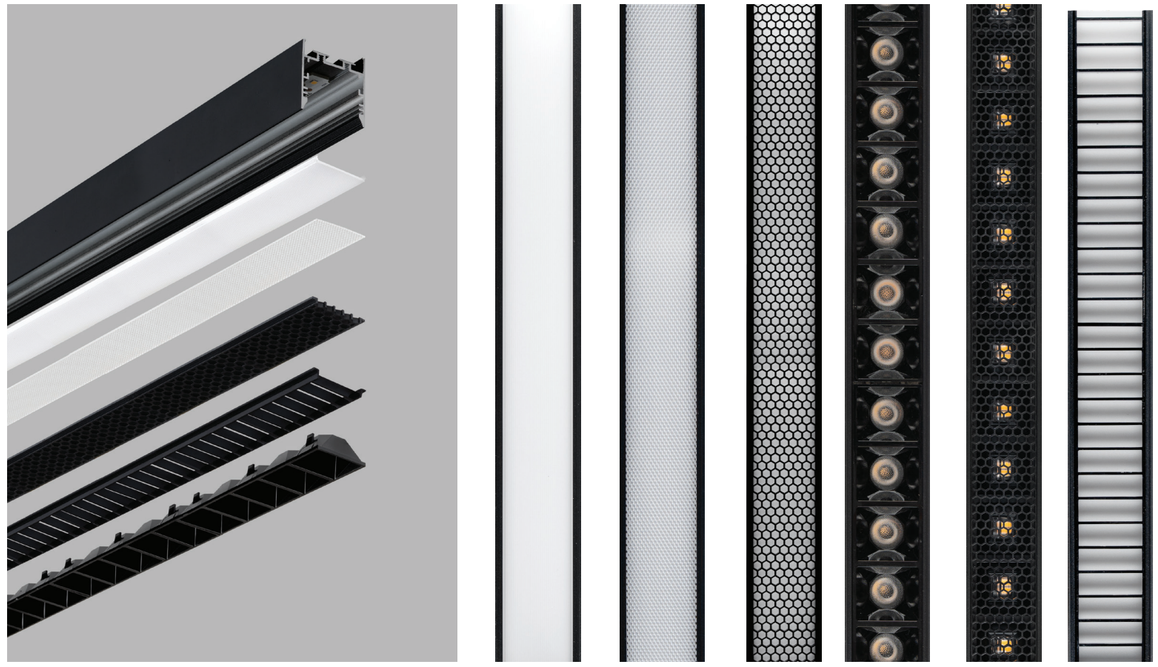





Light Quality and Perfomance


The range is available in 2700K, 3000K, 3500K, and 4000K, covering different lighting atmospheres from warm and comfortable to clean and neutral. Tunable White versions are also available for projects that require dynamic color temperature control. With high CRI, efficient performance, and excellent color consistency with SDCM<3, the luminaires ensure accurate color rendering, stable light quality, and a uniform visual result across the entire installation.

AXIS 51x75

CEILING / SUSPENDED / TRIMLESS

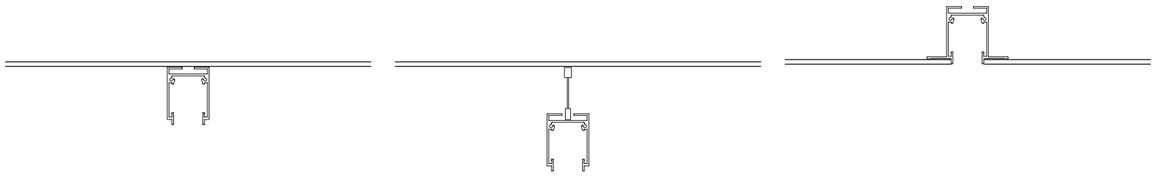



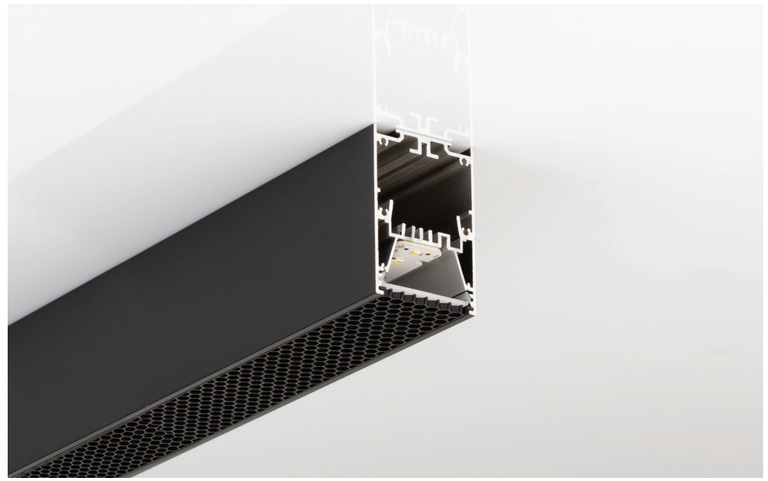

Features

Reflectors Color




Matt Black

Finishing Color



Black




White



Custom Ral

- Standard suspension kit and power cable at 2m
- Up to 5 meters single unit

Optics / Cover

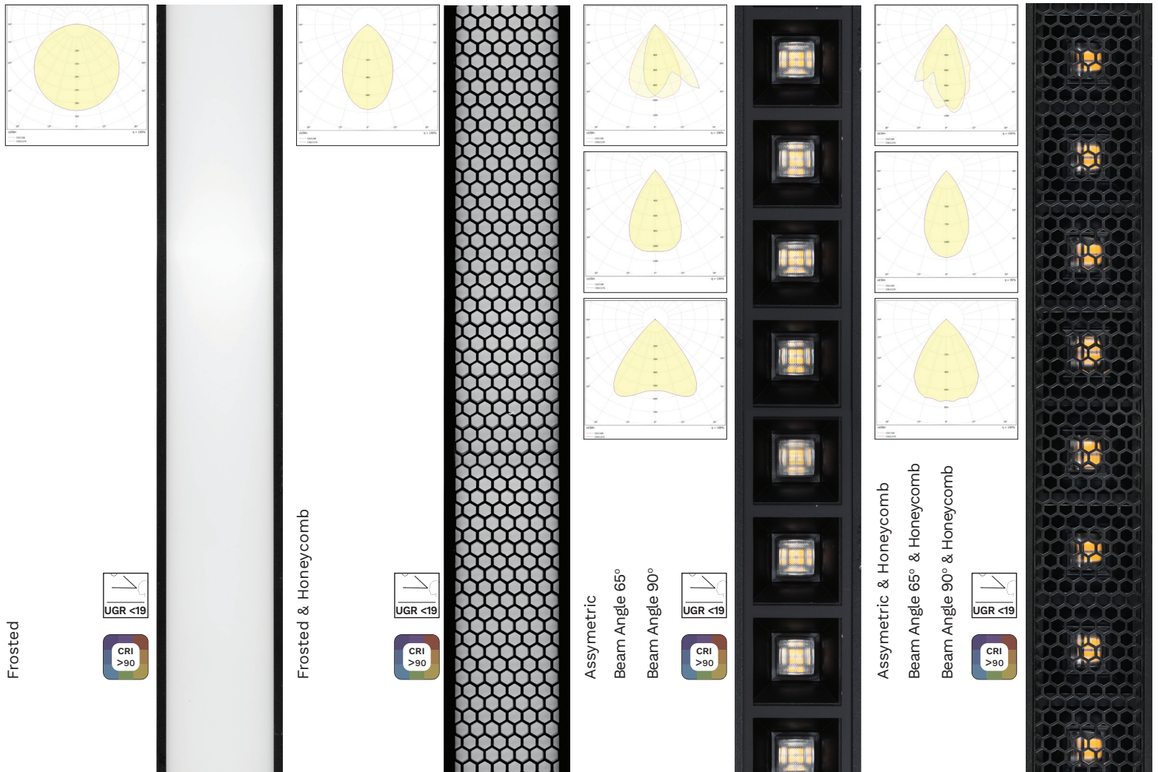

Technical Data

Options		LO			HE			HO	
	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W
Optics: Light Source (No Optics)	27,80	4208	151	39,30	5826	148	55,10	8120	147
Optics: Frosted	27,80	2313	83	39,30	3231	82	55,10	4361	79
Optics: Frosted + Honeycomb	27,80	678	24	39,30	963	25	55,10	1277	23
Diffusers: Light Source (No Optics)	24,60	4650	189	34,00	6290	185	47,10	8619	182
Diffusers: Lens 65°	24,60	3567	145	34,00	5032	148	47,10	6735	143
Diffusers: Lens 90°	24,60	3124	127	34,00	4284	126	47,10	5793	123
Diffusers: Asymmetric Lens	24,60	2952	120	34,00	4114	121	47,10	5652	120
Diffusers: Lens 65° + Honeycomb	24,60	1711	70	34,00	2405	70	47,40	3275	69
Diffusers: Lens 90° + Honeycomb	24,60	1427	58	34,00	1989	58	47,40	3275	69
Diffusers: Asymmetric Lens + Honeycomb	24,60	1444	59	34,00	2004	59	47,10	2714	58

Code

X - X - X - X - X - X - X - X

Length (mm)
295
575
855
1135
1415
1695
1975
2255
2535
2815
3095
3375
3655
3935
4215
4495
4775

MOUNT TYPE
A5175C - CEILING
A5175S - SUSPENDED
A5175T - TRIMLESS

Optics / Cover
F - Frosted
FH - Frosted & Honeycomb
A - Assymetric
65 - Assymetric Beam angle 65°
90 - Assymetric Beam angle 90°
65H - Beam angle 65° & Honeycomb
90H - Beam angle 90° & Honeycomb
AH - Assymetric & Honeycomb

Reflectors Color*
MB - Matt Black

Output
LO
HE
HO

CCT (K)
27 - 2700
30 - 3000
35 - 3500
40 - 4000
TW - Tunable White


Finishing Color
B - Black
W - White
C - Custom Color


Dimming
O - On/Off
D - DALI
10 - 0-10
T - TRIAC
C - CASAMBI

Example
A5175S-295-F-HE-27-B-D

GRID 34x75

CEILING / SUSPENDED / TRIMLESS

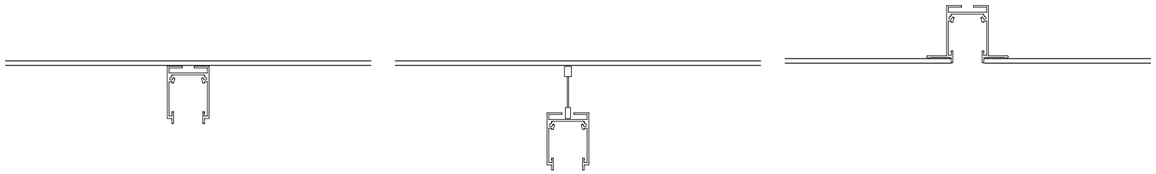






Features


Reflectors Color



Matt Black



Chrome Black



Silver




Gold

Finishing Color



Black



White




Custom Ral

Optics / Cover




Opal





Prismatic



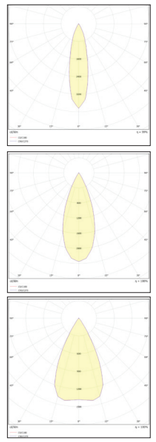

Beam Angle 15°

Beam Angle 30°

Beam Angle 40°



Technical Data

Options		LO			HE			HO	
		Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W
Optics	Light Source (No Optics)	24,40	3806	156	35,30	5295	150	49,90	7235	145
	Opal	24,40	2748	113	35,30	3824	108	49,90	5102	102
	Opal + Prismatic	24,40	2361	96	35,30	3285	93	49,90	4396	88
Diffusers	Light Source (No Optics)	35,00	5250	150	49,20	7282	148	68,40	10054	147
	Smd Lens 15°	35,00	3897	111	49,20	5373	109	68,40	7169	105
	Smd Lens 30°	35,00	3897	111	49,20	5373	109	68,40	7169	105
	Smd Lens 40°	35,00	4239	121	49,20	5516	112	68,40	7636	112

Code

X - X - X - X - X - X - X - X -

Length (mm)
295
575
855
1135
1415
1695
1975
2255
2535
2815
3095
3375
3655
3935
4215
4495
4775

Optics / Cover
O - Opal
P - Prismatic
15 - Beam angle 15°
30 - Beam angle 30°
40 - Beam angle 40°

Reflectors Color*
MB - Matt Black
CB - Chrome Black
S - Silver
G - Gold

Output
LO
HE
HO

CCT (K)
27 - 2700
30 - 3000
35 - 3500
40 - 4000
TW - Tunable White

Finishing Color
B - Black
W - White
C - Custom Color


Dimming
O - On/Off
D - DALI
10 - 0-10
T - TRIAC
C - CASAMBI


MOUNT TYPE
G3475C - CEILING
G3475S - SUSPENDED
G3475T - TRIMLESS

Example
G3475C-3375-30-CB-HE-27-B-D

BEAM 63x82

CEILING / SUSPENDED / **INDIRECT**





Features

Reflectors Color




Matt Black

Finishing Color



Black




White



Custom Ral

Optics / Cover







Frosted










Beam Angle 65°

Beam Angle 90°









Assymetric







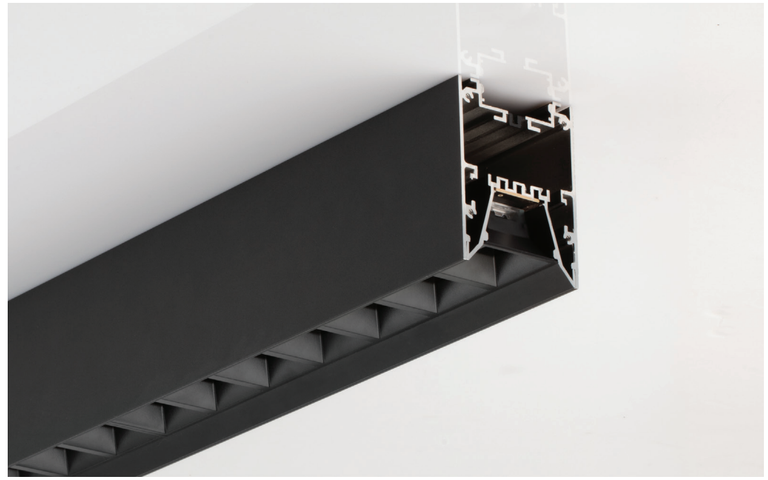

Technical Data

Options		LO			HE			HO	
	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W
Optics — Light Source (No Optics)	25,70	4156	161	38,00	5793	152	53,30	7835	147
Opal	25,70	1931	75	38,00	2731	72	53,30	3668	69
Diffusers — Light Source (No Optics)	22,90	4305	188	32,40	5994	185	45,60	8390	184
Lens 65°	22,90	3469	151	32,40	4866	150	45,60	6637	145
Lens 90°	22,90	2976	130	32,40	4171	129	45,60	5685	125
Asymmetric Lens	22,90	2883	125	32,40	4053	125	45,60	5569	122

Code

X - X - X - X - X - X - X - X - X -

Length (mm)
295
575
855
1135
1415
1695
1975
2255
2535
2815
3095
3375
3655
3935
4215
4495
4775

Optics / Cover
F - Frosted
65 - Beam angle 65°
90 - Beam angle 90°
A - Assymetric

Reflectors Color*
MB - Matt Black

Output
LO
HE
HO

CCT (K)
27 - 2700
30 - 3000
35 - 3500
40 - 4000
TW - Tunable White

Finishing Color
B - Black
W - White
C - Custom Color

Dimming
O - On/Off
D - DALI
10 - 0-10
T - TRIAC
C - CASAMBI


Indirect (Up)
N - No
27 - 2700K
30 - 3000K
40 - 4000K

MOUNT TYPE
B6382C - CEILING
B6382S - SUSPENDED

Example
B6382C-2815-F-MB-HE-TW-B-O-27

CORE 50x36

CEILING / SUSPENDED / TRIMLESS / RECESSED

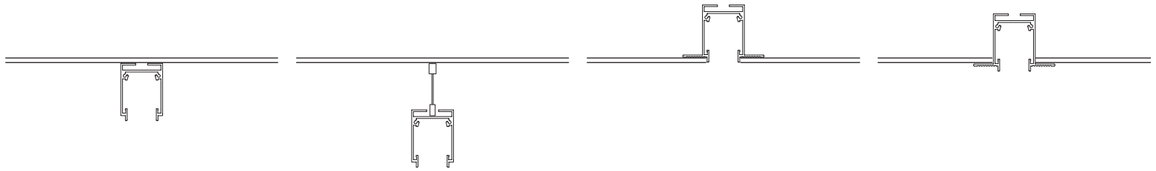

Features

Reflectors Color




Matt Black

Finishing Color



Black




White



Custom Ral

Optics / Cover




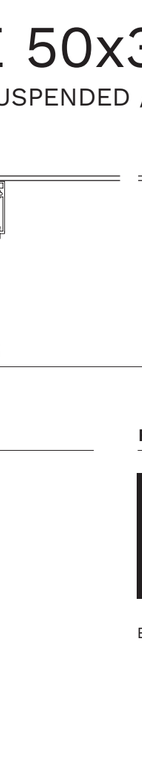

Frosted










Beam Angle 65° & Honeycomb


Beam Angle 90° & Honeycomb


Assymetric & Honeycomb





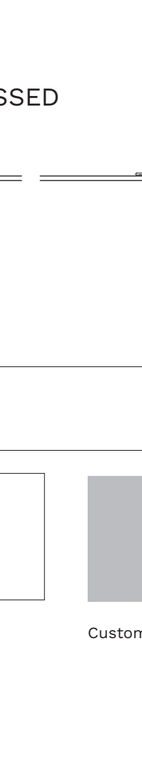









Technical Data

Options	LO			HE			HO		
	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W
Light Source (No Optics)	28,30	4212	149	39,4	5840	148	55,4	8128	146
Frosted	28,30	2852	101	39,4	3988	101	55,4	5402	97
Light Source (No Optics)	24,60	4650	189	34,00	6290	185	47,10	8619	182
Lens 65° + Honeycomb	24,60	1711	70	34,00	2405	70	47,40	3275	69
Lens 90° + Honeycomb	24,60	1427	58	34,00	1989	58	47,40	3275	69
Asymmetric Lens + Honeycomb	24,60	1444	59	34,00	2004	59	47,10	2714	58

Optics

Diffusers

Code

X - X - X - X - X - X - X - X -

Length (mm)
295
575
855
1135
1415
1695
1975
2255
2535
2815
3095
3375
3655
3935
4215
4495
4775

MOUNT TYPE
C5036R - RECESSED
C5036C - CEILING
C5036S - SUSPENDED
C5036T - TRIMLESS

Optics / Cover
F - Frosted
AH - Assymetric & Honeycomb
65H - Beam angle 65° & Honeycomb
90H - Beam angle 90° & Honeycomb

Reflectors Color*
MB - Matt Black

Output
LO
HE
HO

CCT (K)
27 - 2700
30 - 3000
35 - 3500
40 - 4000
TW - Tunable White


Finishing Color
B - Black
W - White
C - Custom Color

Dimming
O - On/Off
D - DALI
10 - 0-10
T - TRIAC
C - CASAMBI

Example
C5036R-2255-AH-MB-HE-27-B-D

EDGE 37x37

CEILING / SUSPENDED / TRIMLESS / RECESSED

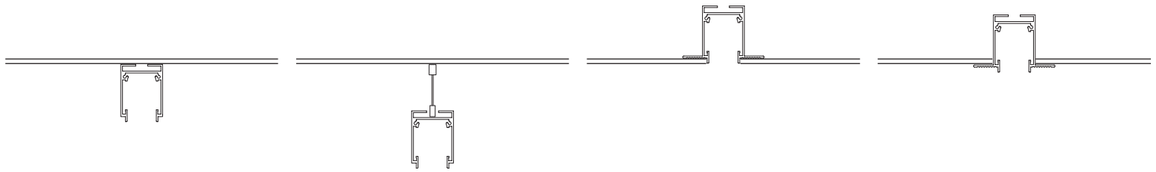


Features


Reflectors Color



Matt Black



Chrome Black



Silver




Gold

Finishing Color



Black





White





Custom Ral

Optics / Cover

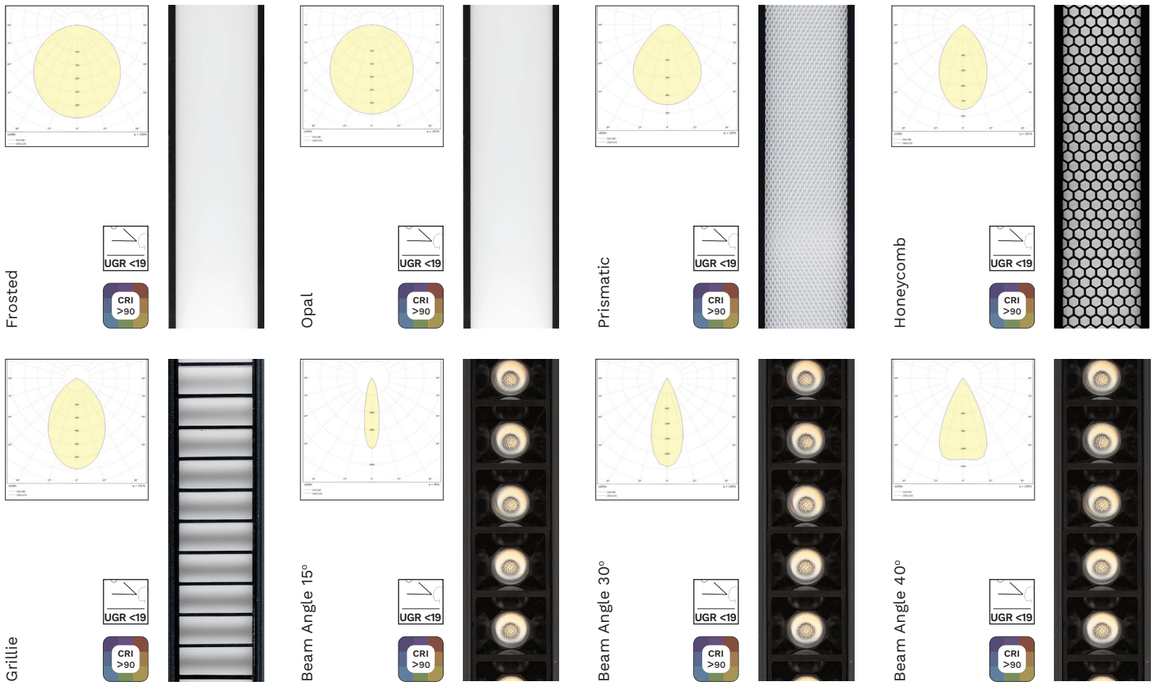

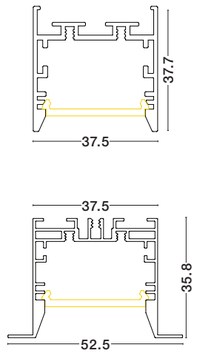

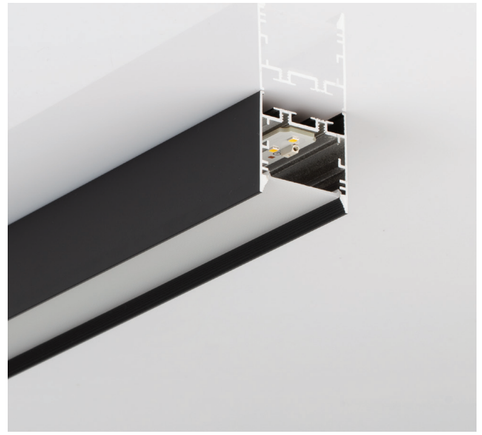



Technical Data

Options		LO			HE			HO	
	Power (W) / m / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W
Optics									
Light Source (No Optics)	28,30	4212	149	39,40	5840	148	55,40	8128	146
Frosted	28,30	1882	66	39,70	2593	65	55,40	3496	63
Opal	28,30	1988	70	39,70	2766	70	55,70	3732	67
Opal + Prismatic	28,30	1630	57	39,70	2271	57	55,40	3068	55
Opal + Honeycomb	28,30	519	18	39,70	723	18	55,40	978	17
Opal + Grillie	28,30	904	32	39,70	1261	32	55,40	1693	30
Diffusers									
Light Source (No Optics)	35,00	5250	150	49,2	7282	148	68,4	10054	147
Lens 15°	35,00	3897	111	49,20	5373	109	68,40	7169	105
Lens 30°	35,00	3897	111	49,20	5373	109	68,40	7169	105
Lens 40°	35,00	4239	121	49,20	5516	112	68,40	7636	112

Code

X - X - X - X - X - X - X - X -

Length (mm)
295
575
855
1135
1415
1695
1975
2255
2535
2815
3095
3375
3655
3935
4215
4495
4775

MOUNT TYPE
E3737C - CEILING
E3737S - SUSPENDED
E3737T - TRIMLESS
E3737R - RECESSED

Optics / Cover
F - Frosted
P - Prismatic
O - Opal
OH - Opal & Honeycomb
OG - Opal & Grille
15 - Beam angle 15°
30 - Beam angle 30°
40 - Beam angle 40°

Reflectors Color*
MB - Matt Black
CB - Chrome Black
S - Silver
G - Gold

Output
LO
HE
HO

CCT (K)
27 - 2700
30 - 3000
35 - 3500
40 - 4000
TW - Tunable White


Finishing Color
B - Black
W - White
C - Custom Color


Dimming
O - On/Off
D - DALI
10 - 0-10
T - TRIAC
C - CASAMBI

Example
E5175C-295-OH-CB-HE-27-B-T

FLOW 23x70

CEILING / SUSPENDED



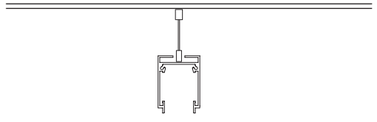

Features

Reflectors Color



Matt Black



Black with Silver




White with Black

Finishing Color



Black




White




Custom Ral


Optics / Cover



Frosted



Beam Angle 36°





Technical Data

Options		LO			HE			HO	
	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W	Power (W) / m	Lumen / m	Lumen / W
Optics Light Source (No Optics)	17,40	1948	112	31,30	3380	108	46,30	4676	101
Optics Smd Lens 36°	17,40	1531	87	31,30	2882	92	46,30	4098	88
Optics Frosted	-	-	-	-	-	-	46,30	2420	52

Code

X - X - X - X - X - X - X - X -

Length (mm)
295
575
855
1135
1415
1695
1975
2255
2535
2815
3095
3375
3655
3935
4215
4495
4775

Optics / Cover
F - Frosted
36 - Beam angle 36*

Reflectors Color*
MB - Matt Black
BS - Black with Silver Reflectors
WB - White with Black Reflectors

Output
LO
HE
HO

CCT (K)
27 - 2700
30 - 3000
35 - 3500
40 - 4000

Finishing Color
B - Black
W - White
C - Custom Color

Dimming
O - On/Off
D - DALI
10 - 0-10
T - TRIAC
C - CASAMBI

MOUNT TYPE
F2370C - CEILING
F2370S - SUSPENDED

Example
F2370C-1975-36-MB-HE-30-C-10

